



# ALS Accelerator Update

---

Christoph Steier

*ALS Accelerator Physics Group*

- List of Upgrades during FY05
- Status of Top-off Upgrade
- Upgrade of fs-Slicing Source/First In-Vacuum ID in ALS
- Elliptically Polarizing Undulators
- Gap in Fill Pattern, Phase Transients and fs-Slicing
- What is next: Upcoming Installations/Improvements



# Introduction

- **User requirements are constantly evolving (user experiments get more sensitive)**
  - Performance of few years ago is not sufficient now!
  - Have to constantly improve stability and in some cases brightness.
  - Adding new capabilities that make facility more complex/complicated
- **Future upgrades will require further evolution of stability, etc.**
- **Have to optimize complete system of accelerator+beamlines**
  - Close cooperation of all groups



# Accelerator improvements last year

- **New Capabilities (non Top-Off):**
  - **New in-vacuum undulator (first at ALS) installed in straight 5, including chicanes, photon stops, ...**
    - **5.5 mm min. magnetic gap, installed in upstream half of straight**
  - **Converted more skew quadrupoles for higher strength for fs-slicing vertical dispersion bump**
  - **Installed 3<sup>rd</sup> EPU (for PEEM-3, 11.0.1), first chicaned straight filled with 2 undulators**
    - **Orbit, tune, skew feed-forward work well together for both devices**
- **Top-off Preparation:**
  - **Installed first prototype of new adjustable scraper/collimator for top-off radiation protection**
  - **Modified beamline 4.0 to allow top-off injection tests with beamline shutters open**
  - **Many more top-off work done outside accelerator**



# More Hardware Work



- **Stability/Performance:**
  - Complete storage ring was surveyed + some subset of individual magnets realigned
    - Improved temperature correction and analysis
  - Finished installing skew quadrupole compensation coils in all 4 EPU vacuum chambers
    - Further improved stability of vertical beamsize
  - New set of computer interface cards – improved fast orbit feedback operation
- **Reliability:**
  - Second set of waveguide higher order mode (HOM) dampers in main RF cavities
    - Further improved multibunch stability leading to higher reliability (now nearly passively stable with HC)
  - Replaced original fast orbit feed-forward on EPUs with digital version
    - Incorporates skew quadrupole correction, more reliable, lower noise



# What is Top-off operation of the ALS?

*Top-off operation is quasi-continuous injection into the storage ring*


**Beam current history for one day**

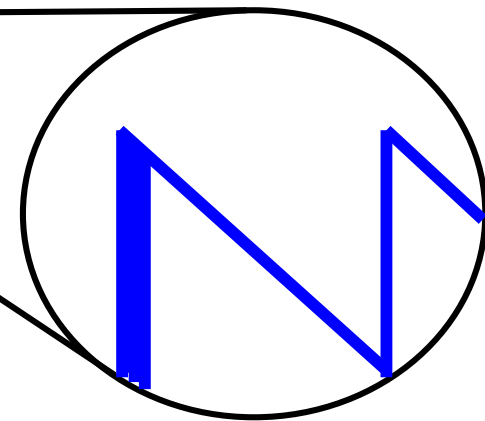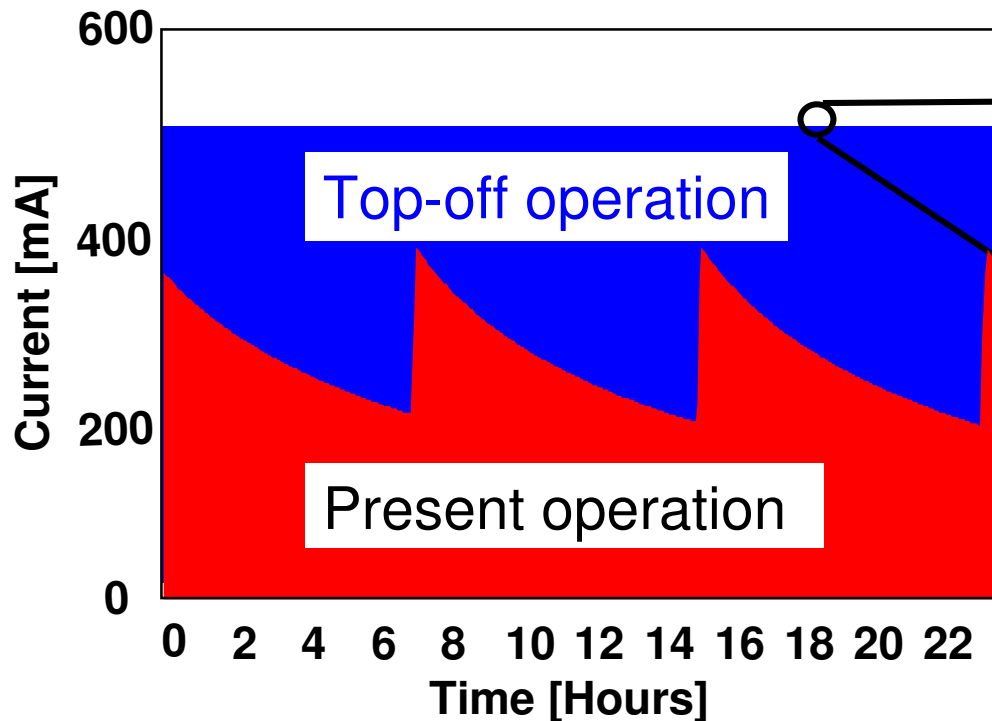

**Choice of 500 mA requires minimum upgrades to beamlines and storage ring**



# Brightness comparison 2007

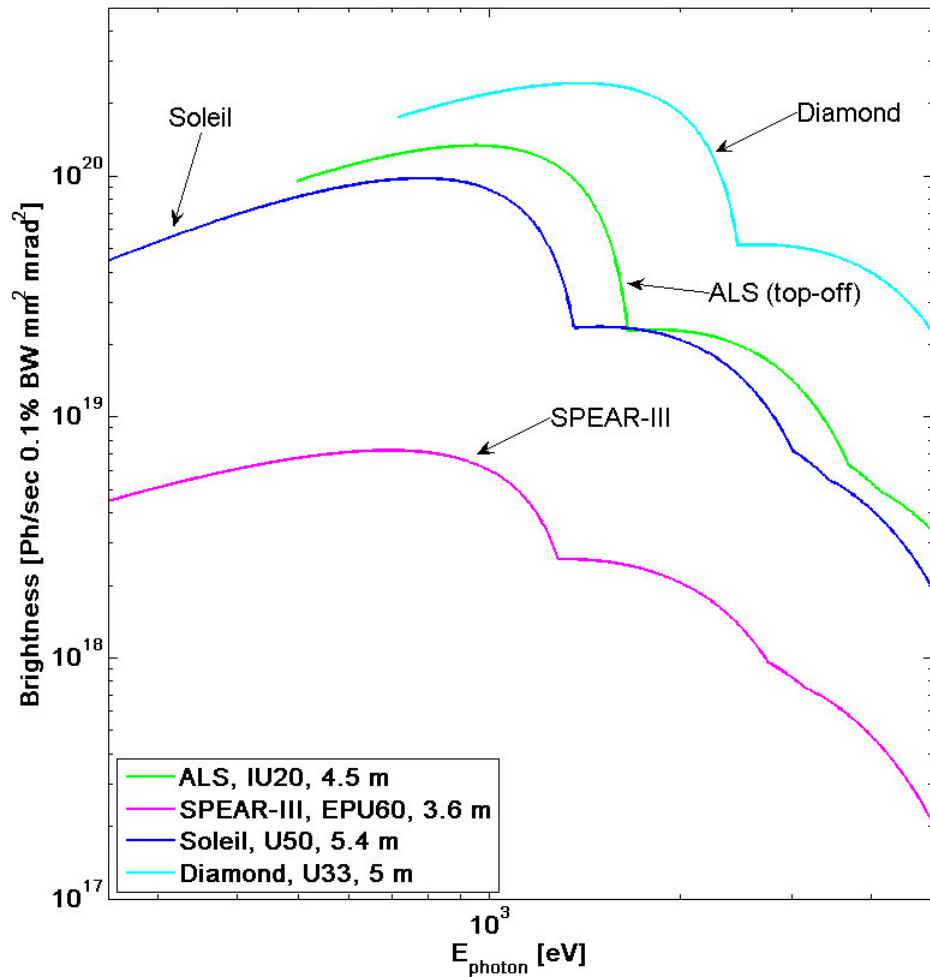

- Top-off upgrade and current undulator technology: ALS competitive with best newer light sources around 1 keV
- Detailed beam parameters for comparison listed on next slide
- Undulator and beam parameters expected for 2007 are plotted



## Beam parameters, ALS and other Light Sources

Param. \ Ring	ALS (top-off)	Diamond	Soleil	Spears III	APS
E [GeV]	1.9	3.0	2.75	3.0	7.0
I [mA]	400 (500)	300	500	500	100
$\epsilon_x$ [nm] (effective)	6.4	3.0	5.6	18.9	3.0
$\sigma_x$ [ $\mu\text{m}$ ]	299	123	384	450	276
$\sigma_x'$ [ $\mu\text{r}$ ]	21.4	24.2	14.5	42.0	11.3
$\epsilon_y$ [pm]	140 (30)	27	37	174	25
$\sigma_y$ [ $\mu\text{m}$ ]	23 (8)	6.4	8	29	11.2
$\sigma_y'$ [ $\mu\text{r}$ ]	6 (3.6)	4.2	4.6	6	2.2
Energy Spread [%]	0.097	0.096	0.1016	0.096	0.096



## (Reduced) Scope of the Top-off Upgrade


---

- Upgrade injector to enable full energy injection
- Improve diagnostics and other existing systems where necessary for reliability
- Upgrade radiation safety system to allow injection with shutters open
- Minimize injection transients to reasonable levels and provide a gating signal
- Migrate to higher current and smaller vertical beamsizes
- Transition to Top-off with minimal negative impact to users





# Upgrade injector to enable full energy injection


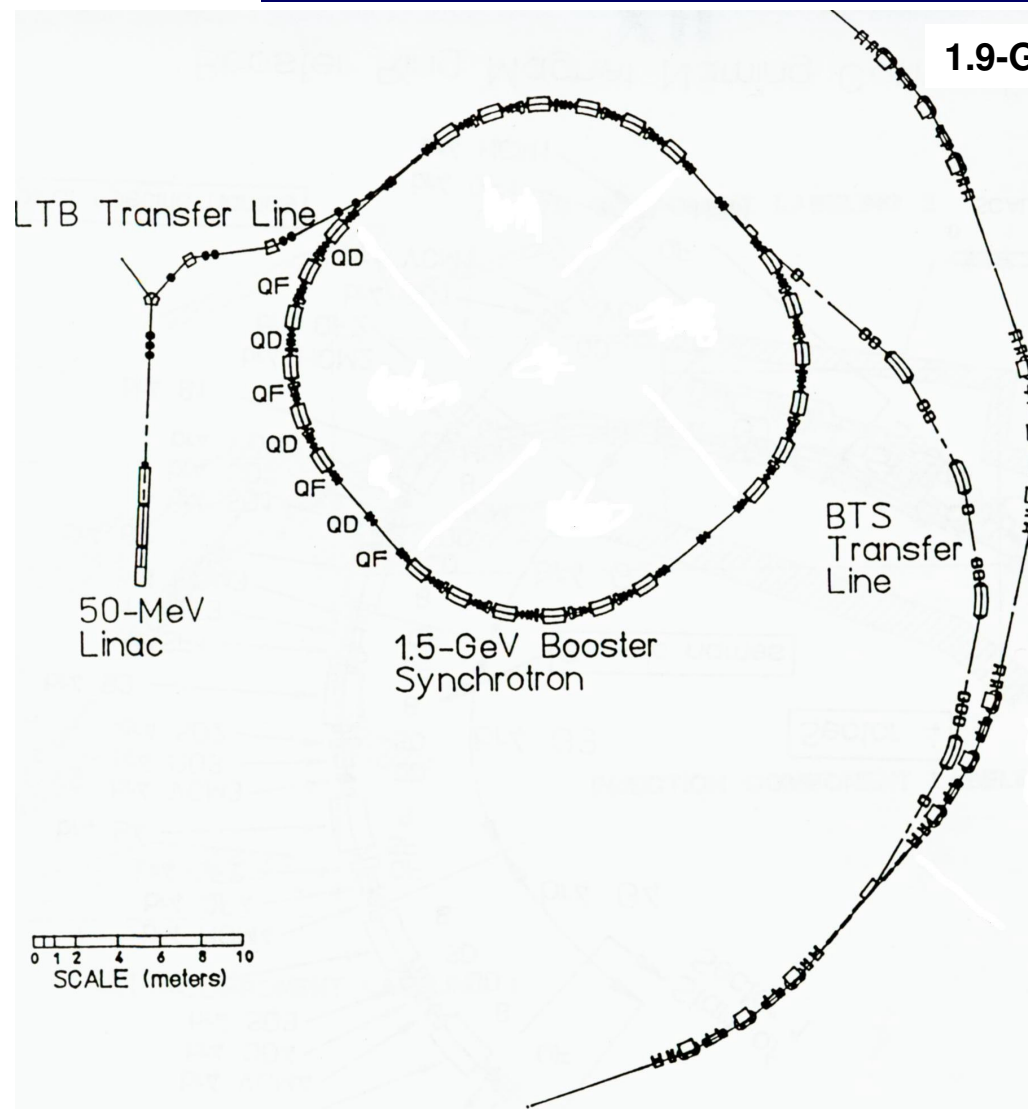


- **New booster+BTS DC Power Supplies and Controls**
- **Upgrade of the booster RF system (e.g. power)**
- **Modifications of the Pulsed Magnets and Supplies**



# Orbit distortion due to injection elements

- **Similar problem at all top-off facilities – we try to combine best mitigation approaches**
  - Incoming beam is only small fraction of total intensity
  - But injection elements also perturb stored beam
- **Conducted experiments with users**
  - Most experiments insensitive to any distortion
  - Very few experiments (STXM, IR) see no-closure of bump and will require gating

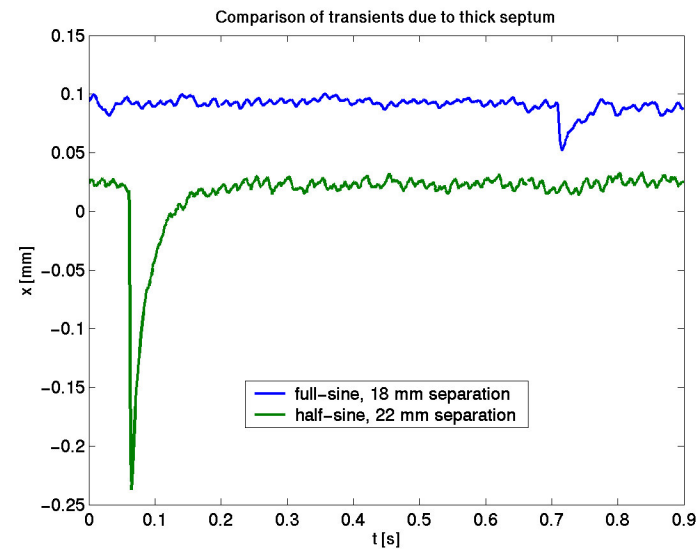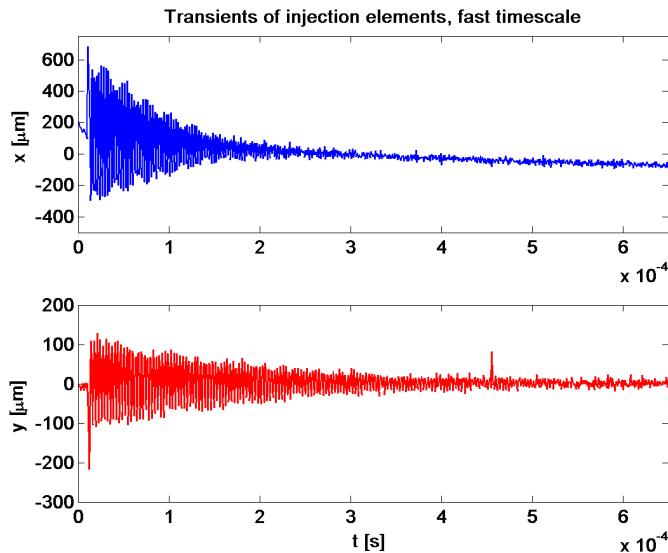



## Major Accomplishments in FY05


---

- Conceptual Design Review of the Project in November 2004
- Received 3 M\$ in FY05 from BES in March 2005  
(on top of 1 M\$ earlier funding)
- Performed Extensive Testing of Pulsed Magnet Systems
- Finished Design work on major systems
- Began Procurement of the Major Long Lead Items
- Conducted Many Tests and Simulations Concerning Radiation Safety and Began Upgrading the Radiation Protection System



# Tests of the Pulsed Magnet Systems

- Successfully tested each of the Pulsed Magnets at full energy
- Currently finishing (short) lifetime tests

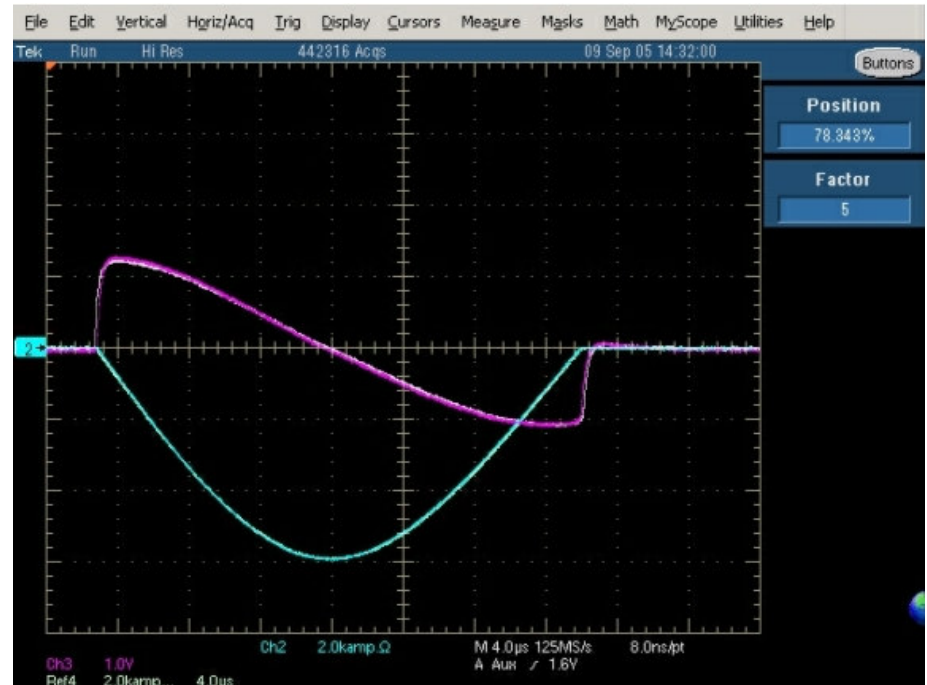

Thin Septum Test Setup



## Major Accomplishments in FY05

---


- Conceptual Design Review of the Project in November 2004
- Received 3 M\$ in FY05 from BES in March 2005  
(on top of 1 M\$ earlier funding)
- Performed Extensive Testing of Pulsed Magnet Systems
- Finished Design work on major systems
- Began Procurement of the Major Long Lead Items
- Conducted Many Tests and Simulations Concerning Radiation Safety and Began Upgrading the Radiation Protection System



# Upgrading our Radiation Protection Systems


## Changes in operation after Top-Off

- Injection with the personnel safety shutters open
- Higher stored beam losses
- Injection with undulators closed

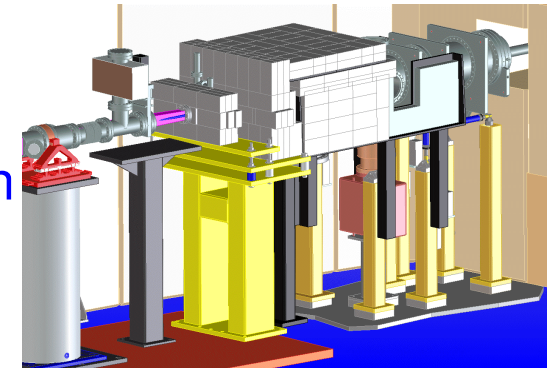

The radiation protection systems (interlocks, collimation, local shielding) will be upgraded to ensure safe operation with Top-off

- Extensive testing on beamline 4.0  
(already tested 1.5 GeV top-off with beamline 4.0 open)
- Working closely with DOE
- (External) Review in Spring 06
- ALS Safety Analysis Document (SAD) will be modified

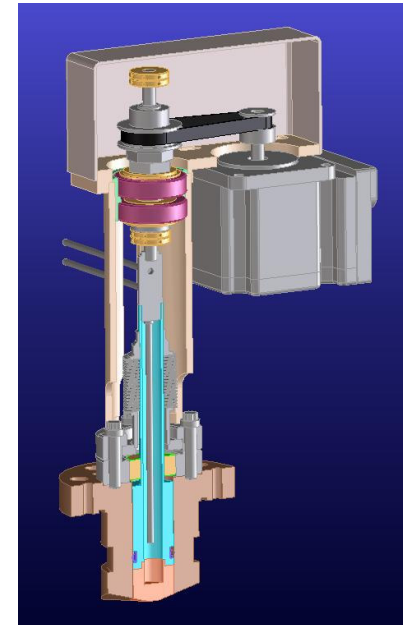



# Top-Off and 2-Bunch Operation

- The present baseline scope of the Top-off upgrade does not include provisions for injecting “clean” bunches into the storage ring anymore
  - Using top-off injection during two-bunch operation, there would be some current in “untargeted bunches” that may not be acceptable for some 2-bunch users
- Techniques exist (SPRING-8, ESRF) for “cleaning” the bunches in the injector  $\Rightarrow$  expensive, part of delayed scope
- It may be possible to clean bunches in storage ring during top-off, but:
  - Beam will be unstable during cleaning
  - Will require (all) users to use a gating signal (of at least 100 ms)





## Future (Top-off) Plans

---

- Extended shutdown will be in Fall 2006
  - Exact date and duration to be determined (6 to 8 weeks including initial commissioning)
- Plan to operate with full-energy injection immediately following the shutdown
- Will slowly migrate to full top-off operation during the following six months



# Femtosing with Undulator in Straight 6

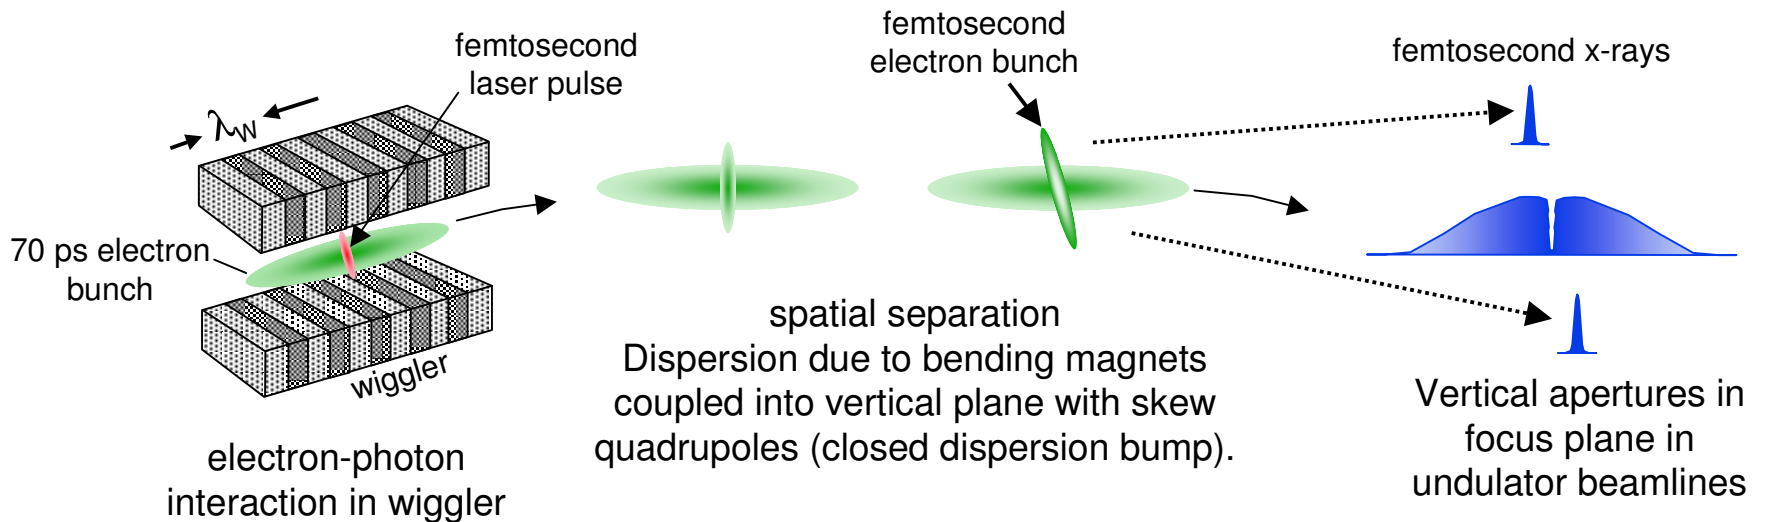
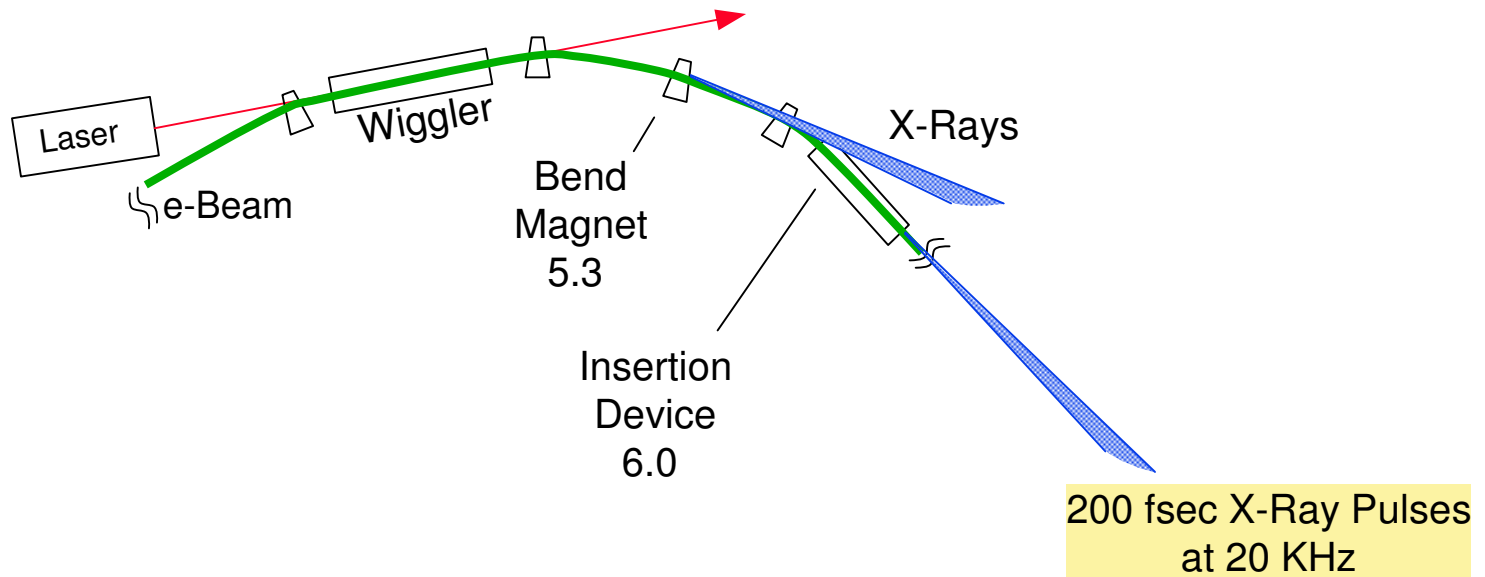




# Undulator Source for fs-slicing

- **Main accelerator physics challenges were:**
  - **Beam Dynamics impact of both insertion devices**
  - **Creation of sufficiently large vertical dispersion bump for spatial separation (very complex change of the local lattice in 3 arcs)**
  - **Reduction of vertical baseline emittance and control of beamsize stability**
  - **Minimum allowable gap for radiator**
  - **Potential radiation damage to in-vacuum undulator (especially in top-off operation)**

# Pictures of new IVID (Sumitomo)

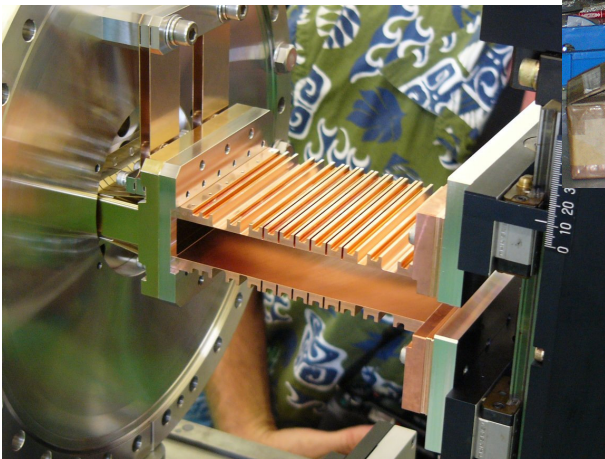
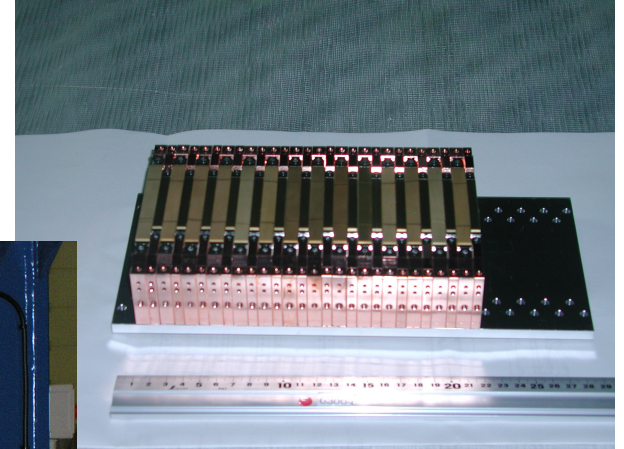


- 30 mm period, hybrid
- 50 periods
- 5.5 mm min. magnetic gap
- 1.52 T peak field






# Improved dispersion bump

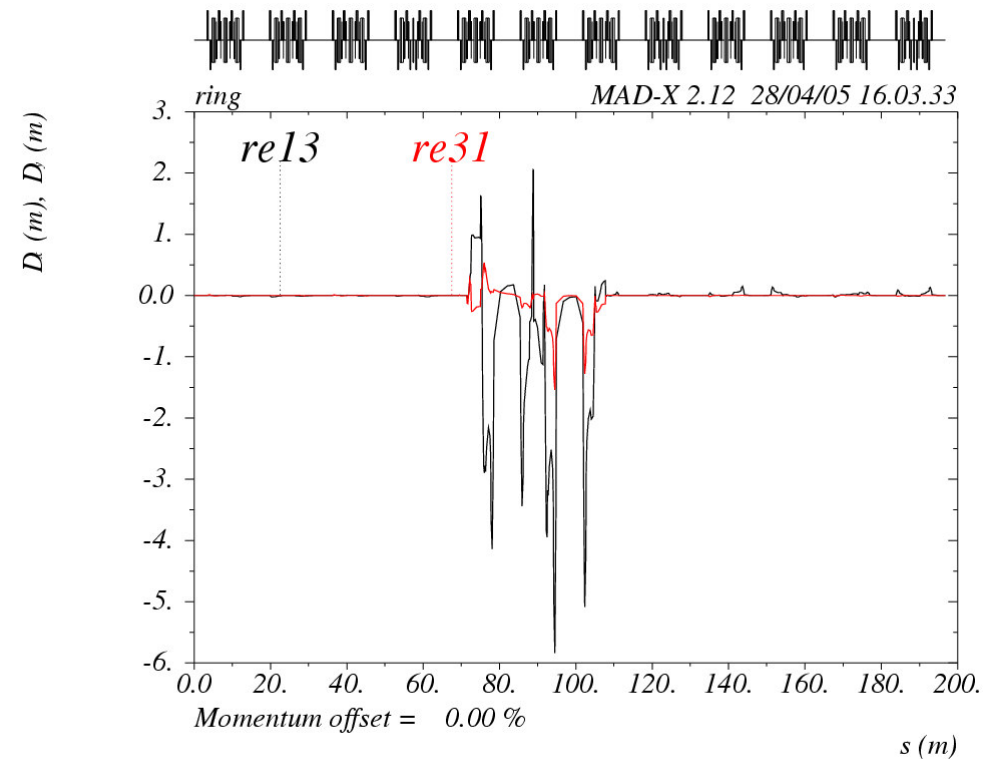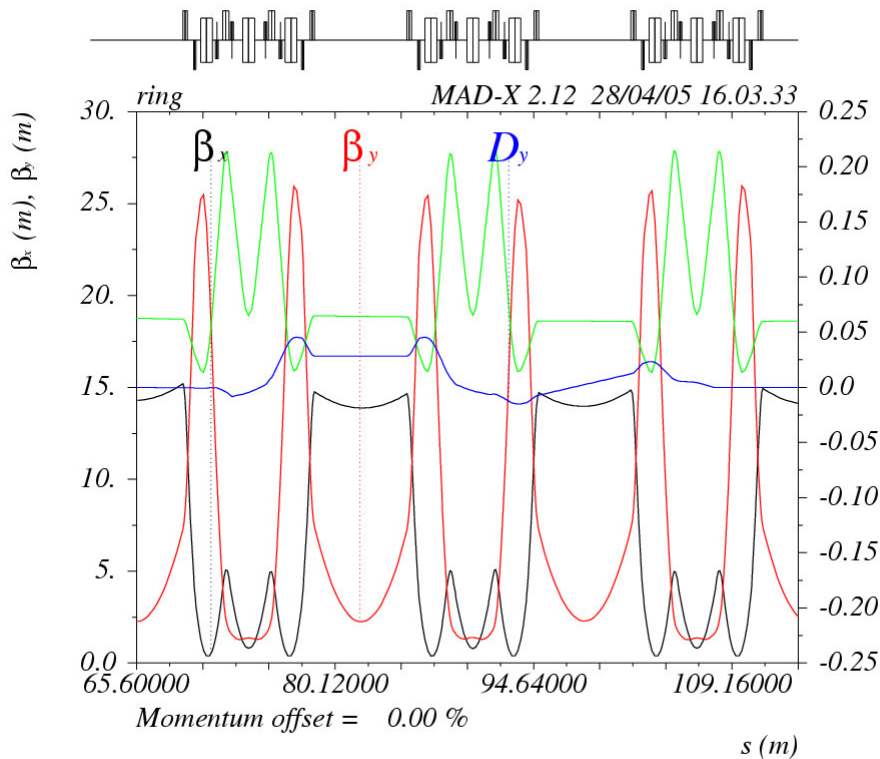

- **New higher tune lattice required modification of skew quadrupole scheme:**
  - Now we use 12 (old 4) skew quads, spanning 3 (old 2) arcs
  - Scheme is improved in terms of beam dynamics: Locally coupling in IVID straight is near zero





# Closing IVID to minimum aperture

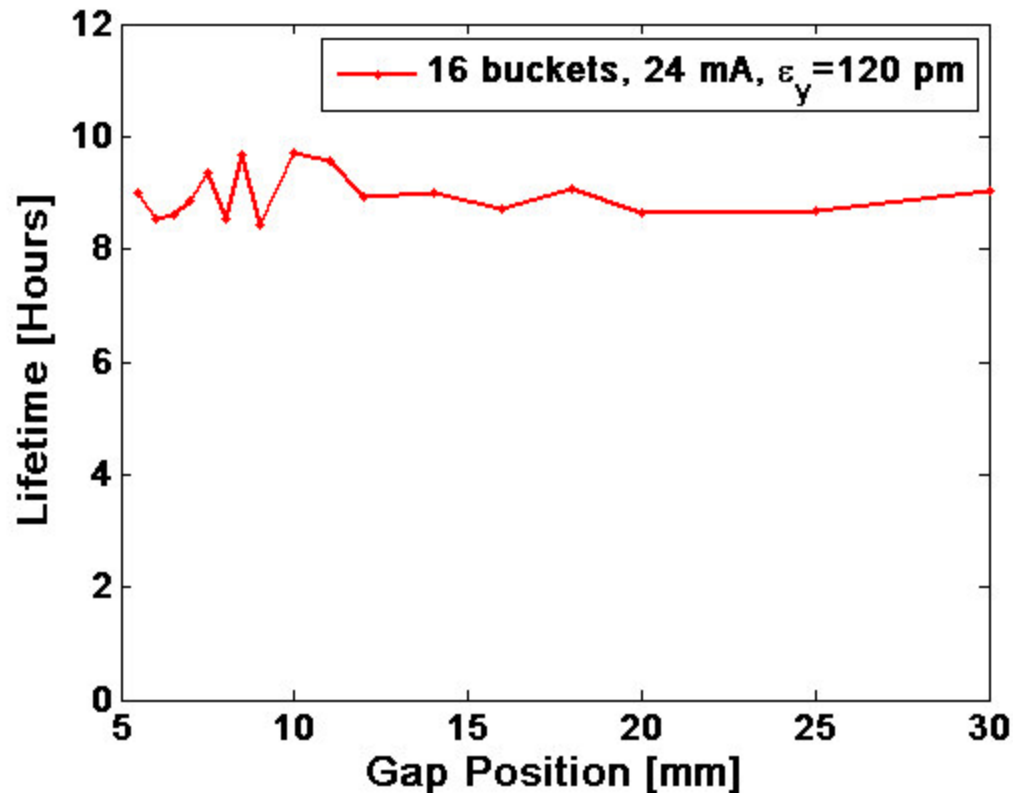

- Closed (magnetic) gap down to 5.5 mm
- No Touschek lifetime degradation for normal/small coupling at 1.5 mA/bunch
- No TMCI instability in two-bunch mode at 50 mA
- Are using scrapers elsewhere to avoid demagnetization (1<sup>st</sup> already installed)

# APPLE-II type EPU

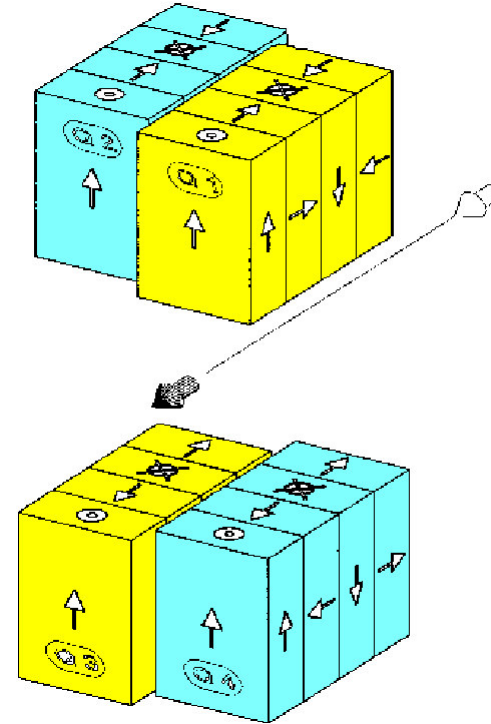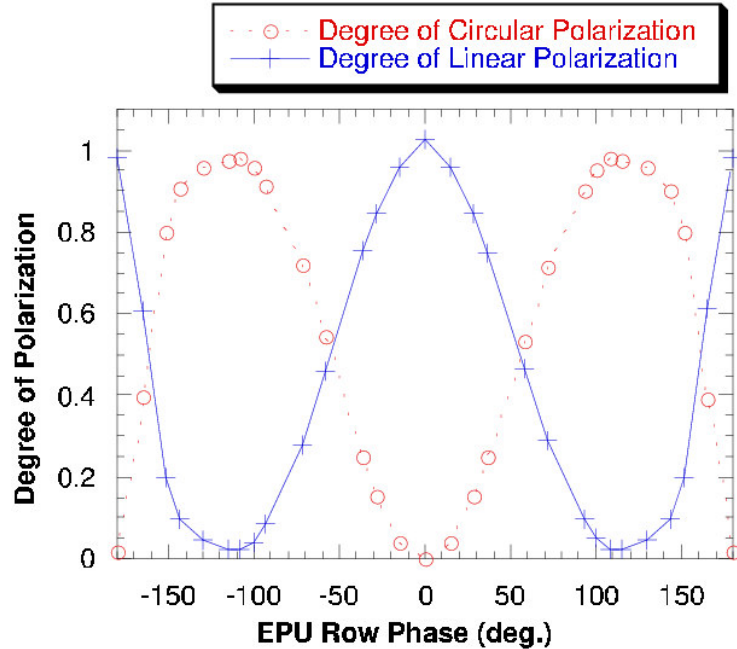

- Four quadrant pure permanent magnet undulator
- Vertical gap affects photon energy
- Longitudinal phase of two quadrants selects polarization (linear, elliptical, circular) + energy
  - Extremely important for many of core ALS science applications
  - Large expansion of number of EPU's expected at ALS






# EPU effects

1. Variation of on axis field integrals with EPU phase (**causing orbit distortions**).
2. Variations of the (mostly **vertical**) **beamsize** (both with gap and with phase):
  - Due to focusing changes (systematic focusing terms from the bulk of the undulator).
  - Due to coupling terms (skew quadrupole like or solenoid like).
3. Higher order effects impacting the **dynamic** (or momentum) **aperture**, for example due to the field roll-off, which is quite significant and systematic in circular polarization mode.






# EPU FEED FORWARD ORBIT CORRECTION

## Orbit Error without Feed Forward Correction

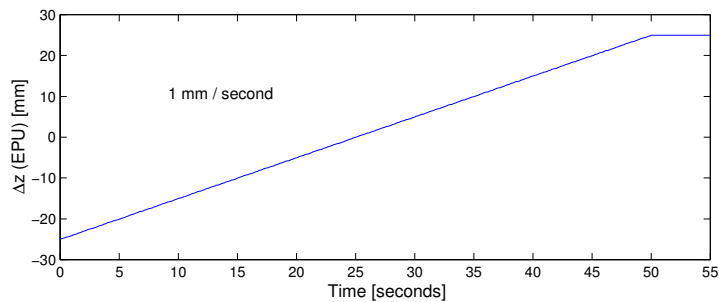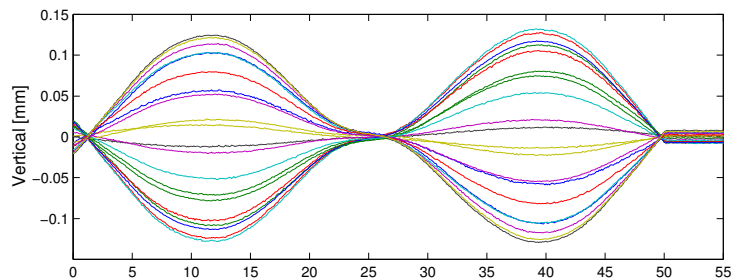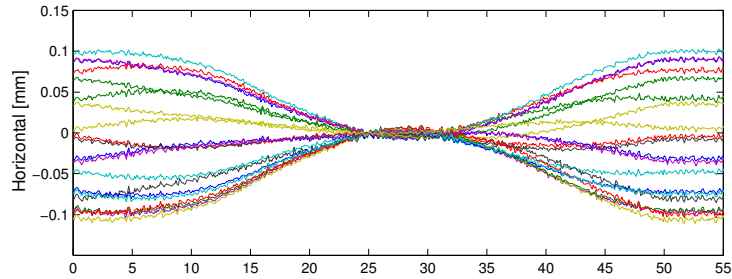

## 100 Hz Feed Forward Correction

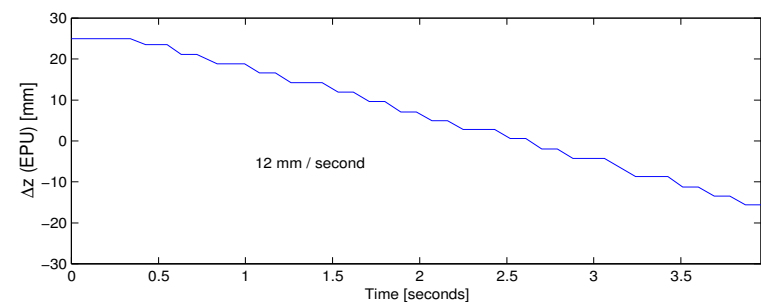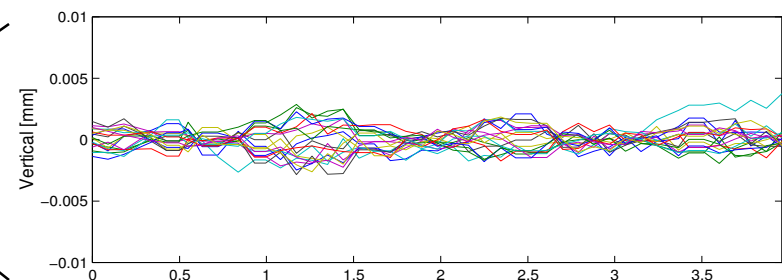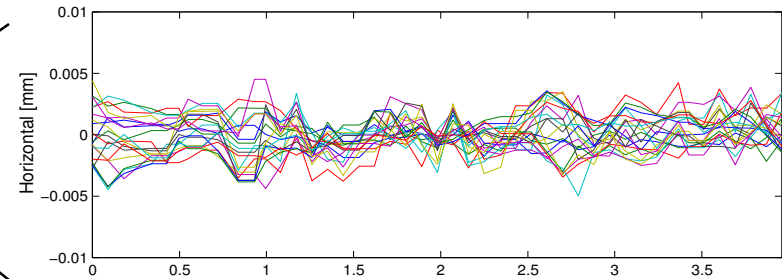


Implemented since 2000





# Skew quadrupole compensation for EPU's


- **Beamspace variation was solved last year (2004): Installed correction coils for feedforward based compensation – routine use since June/September**
- **Early this year we identified the root cause: 2-3 micron correlated motion of magnet modules due to magnetic forces**
- **Will be able to modify design of future device such that active correction will not be necessary!**

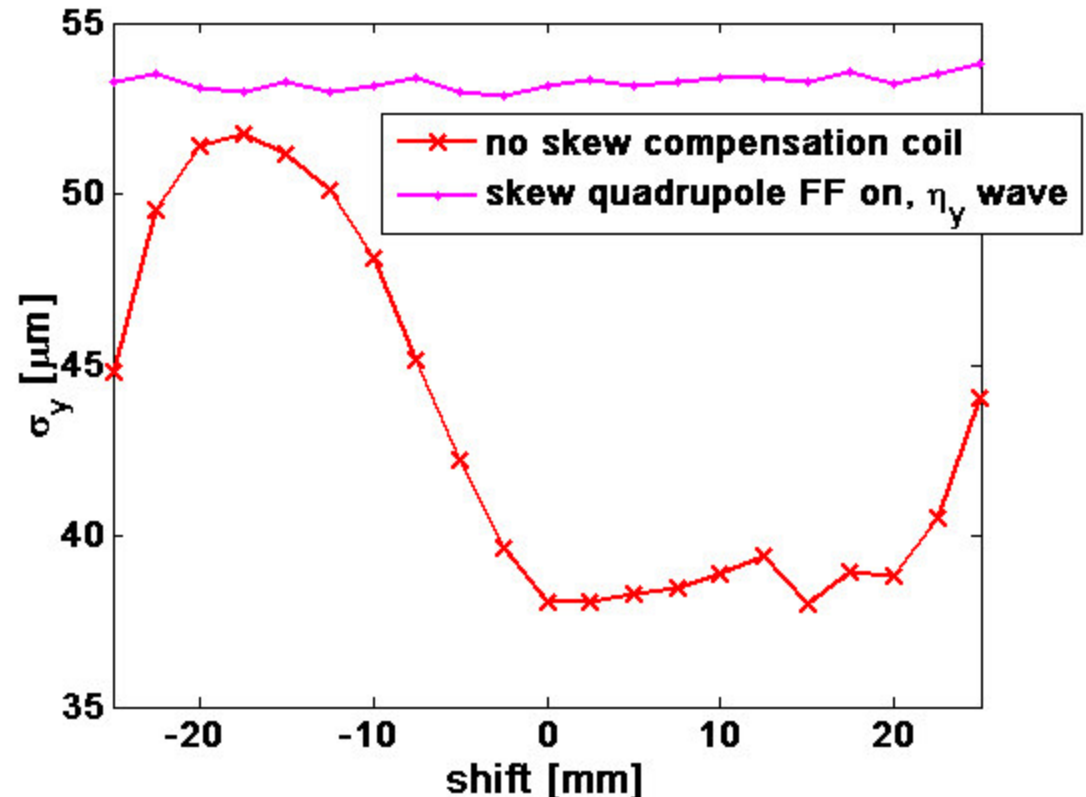


- **Just for reference: Whenever an undulator moves, about 120-150 magnets are changed to compensate for the effect (slow+fast feed-forward, slow+fast feedback)**



# Dynamic Field Integrals

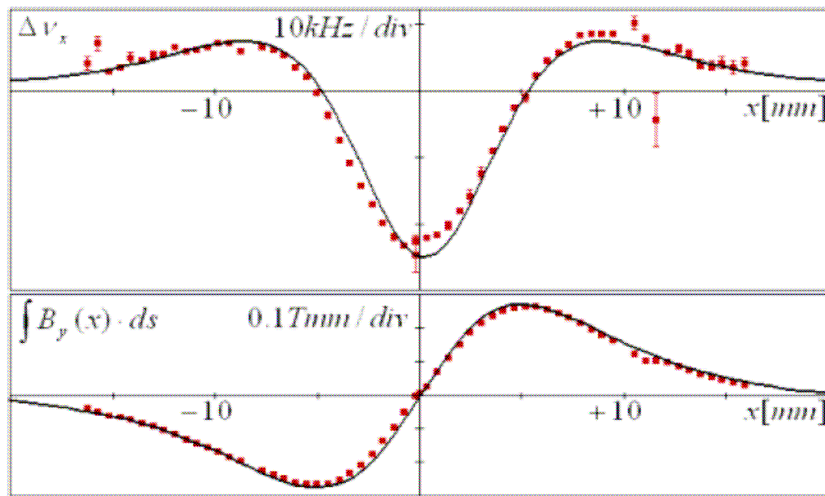




BESSY, UE52, calculated and measured dynamic field integrals

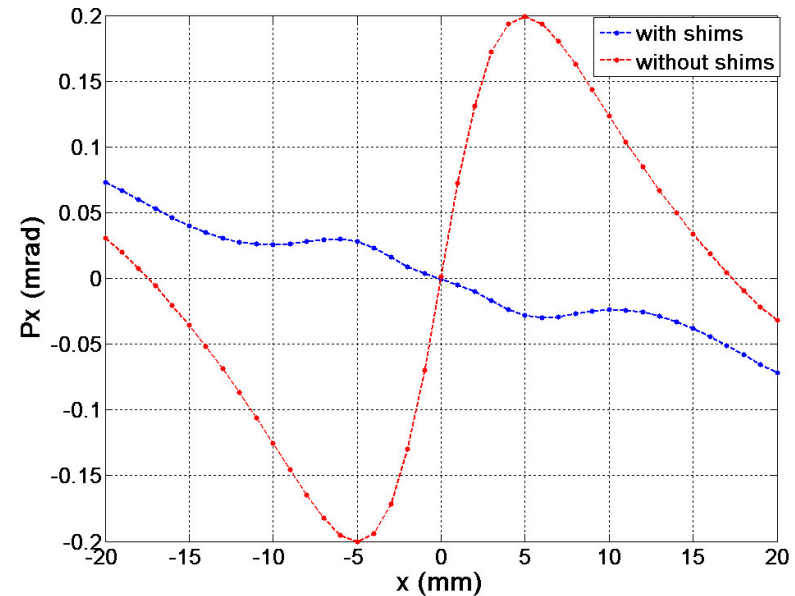


ALS, EPU90, calculated dynamic field integrals w/o and with shimming

- **Field roll-off together with undulating trajectories**
  - **No complete cancellation in one period**
- **Can generate significant so-called dynamic field integrals (worst in linear vertical polarization) – scale with period and field squared!**
- **Started intensive measurement program at ALS**

# Correction with Shims

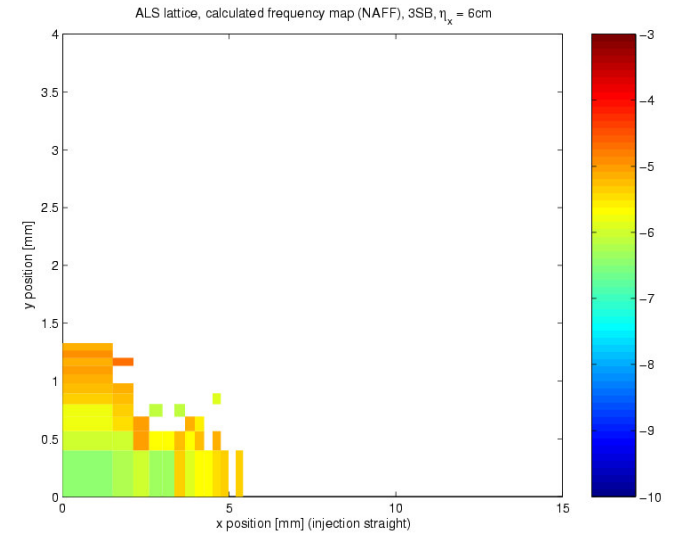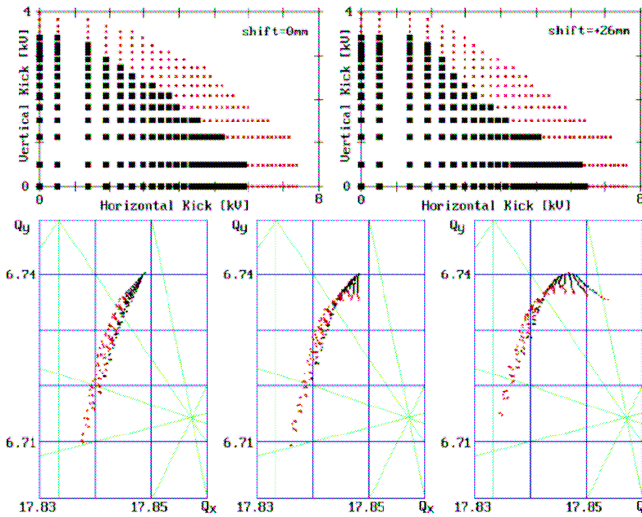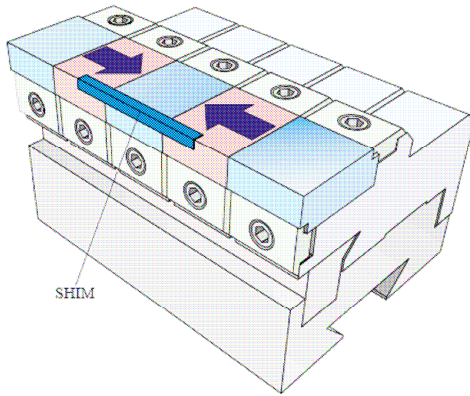

- Shims can produce real multipoles that (partially) compensate dynamic field integrals
- Systematic+successful tests at BESSY with 52 mm period EPU
- Simulations for ALS very encouraging – large expansion of number of EPUs seems possible!

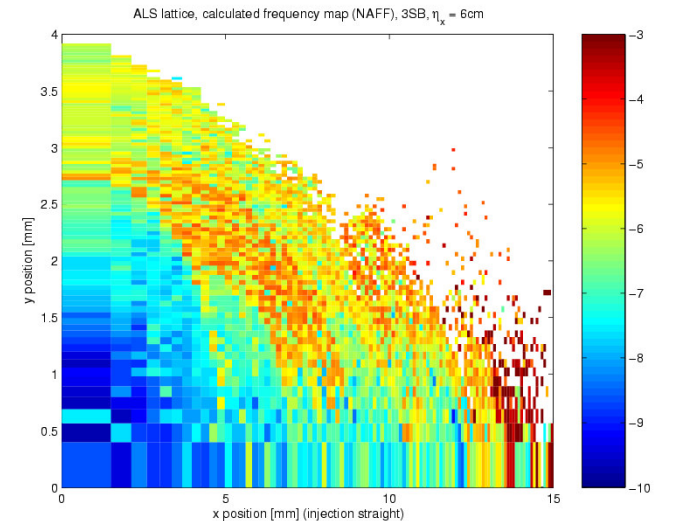





## Gaps in fill pattern, phase transients, fs-Slicing

- Timing experiments use gap in fill structure or ‘camshaft’ bunch
- The particular details of the fill pattern have large impact on some key performance parameters of the ALS
  - Lifetime
  - Bunch length
  - Synchronous phase/phase variation
- Underlying reason is fundamental process of beam loading
- Fs-Slicing upgrade will (at some point in the future) require smaller phase transients than we have now.
- Quantitatively: Smaller fill pattern gaps can provide
  - Potential lifetime increase up to 50%
  - Reduced phase transient to facilitate laser synchronization.





# Phase transients

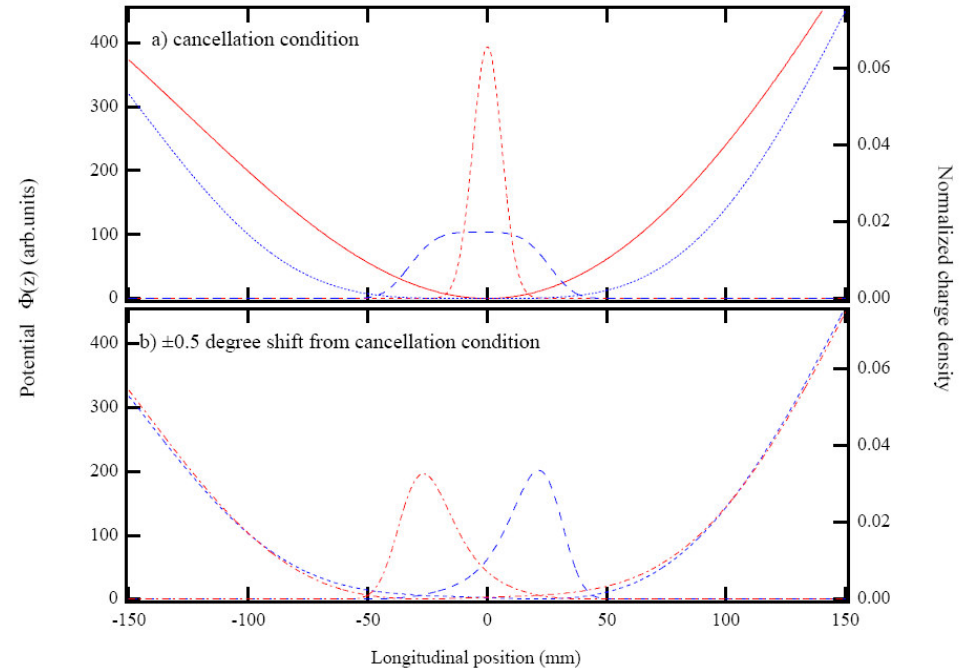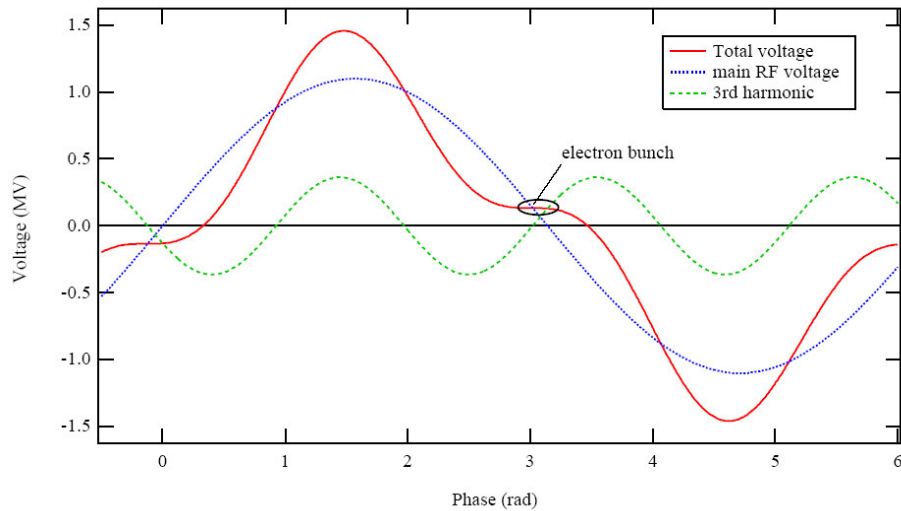

- **Circulating beam induces field in cavities (both main accelerating acvities and third harmonic cavities)**
- **Any deviation from homogeneous filling, like a gap in fill structure induces transient field variation – both amplitude and phase**
- **This variation acts back on beam and generates bunch length and synchronous phase variations along bunch train**
- **Effect gets amplified by bunch lengthening of THC – flattened potential**



# Camshaft, Lifetime, Phase Transients

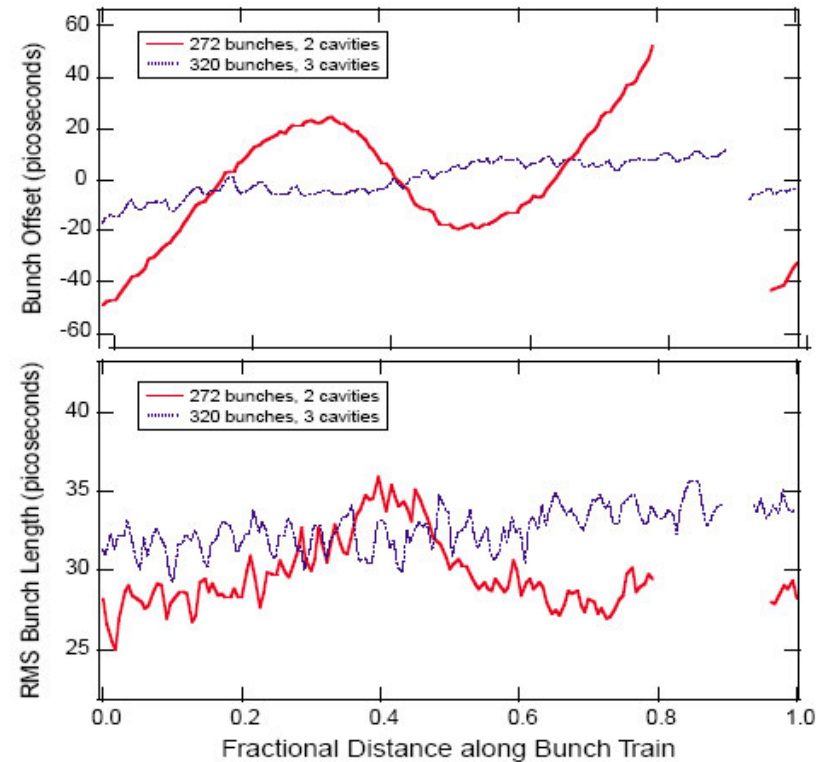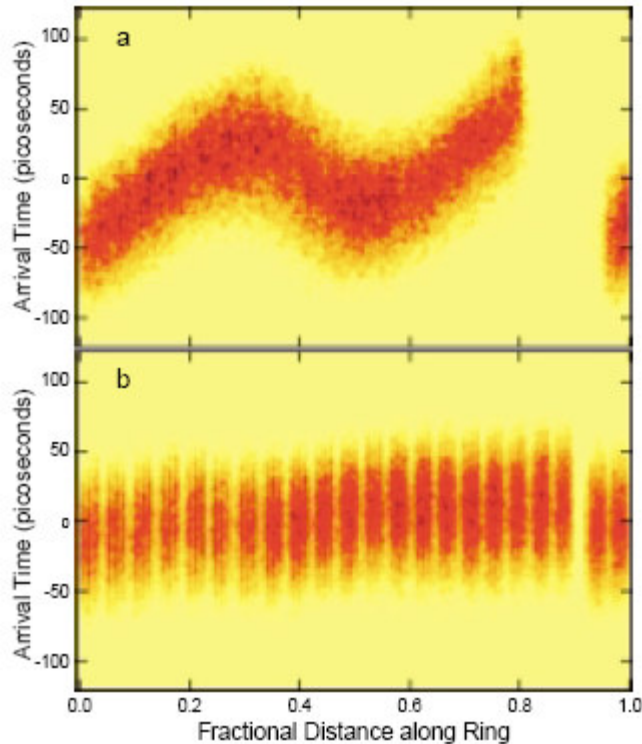

- Synchronous phase varies by more than the bunch length over the length of the bunch train.
- Effect is current and fill pattern dependent (i.e. time dependent)
- This presents big challenge for laser synchronization, etc.
- **Heads up: At some point in the future this will be incompatible.**



## What is next ...

- **Beamline commissioning of fs-slicing upgrade has started, will continue for several months**
- **One more set of main RF HOM dampers in January**
- **Top-off shutdown and initial commissioning in late summer, early fall 2006**
  - In preparation:**
    - **Additional scrapers/collimators in January/February**
    - **Upgrade of pulsed magnets during spring/summer**
    - **Installation of new radiation monitors, ...**
- **MERLIN EPU (long period, quasi periodic) towards end of 2006**
- **Further improvements in orbit stability/feedbacks**
  - We are already at the forefront of light sources, but we believe we will need to improve further (smaller vertical emittances)**



## What we are thinking about

- **Other medium to long term items we are thinking about (or have started to think about):**
  - Further insertion device development
  - (sub)picosecond source/crab cavities
  - Exploring how to free up some straight section space
  - Freeing up  $\frac{1}{2}$  or 1 more straight for insertion devices
  - CIRCE (broadband coherent far infrared source)
  - Control System Upgrade and other Upgrades/Replacements necessary for Reliability
  - Larger scale ALS upgrades





## Conclusions

- **ALS is a world class soft x-ray source with >2000 users annually**
- **Performance is constantly evolving (stability, ...) and despite increasing complexity and ageing, reliability is very high**
- **Short term upgrades are well under way:**
  - Fs-slicing
  - Top-off
  - Longer period EPU's
- **We also started to develop some medium and long term thoughts including potential major upgrades**




# Credits

- **What I have presented is the work of many people:**
  - **ALS AP: W. Byrne, H. Nishimura, G. Portmann, D. Robin, F. Sannibale, T. Scarvie, C. Steier, W. Wan, W. Wittmer**
  - **ALS ME: R. Duarte, R. Schlueter, et al.**
  - **ALS EE: W. Barry, et al.**
  - **ALS Controls: A. Biocca, et al.**
  - **CBP: A. Zholents, J. Corlett, S. Lidia, D. Li, J. Byrd, ...**
  - **ALS: T. Warwick, B. Schoenlein, H. Padmore, S. Rossi, ...**
  - **SPEAR: J. Safranek, A. Terebilo, ...**



# Brightness comparison 2007


- With top-off machine parameters and future insertion devices (s/c  $\text{Nb}_3\text{Sn}$ ) ALS becomes competitive with newer medium energy light sources even around 10 keV
- **APS/ESRF/Spring-8** are of course still higher in brightness in this hard x-ray region

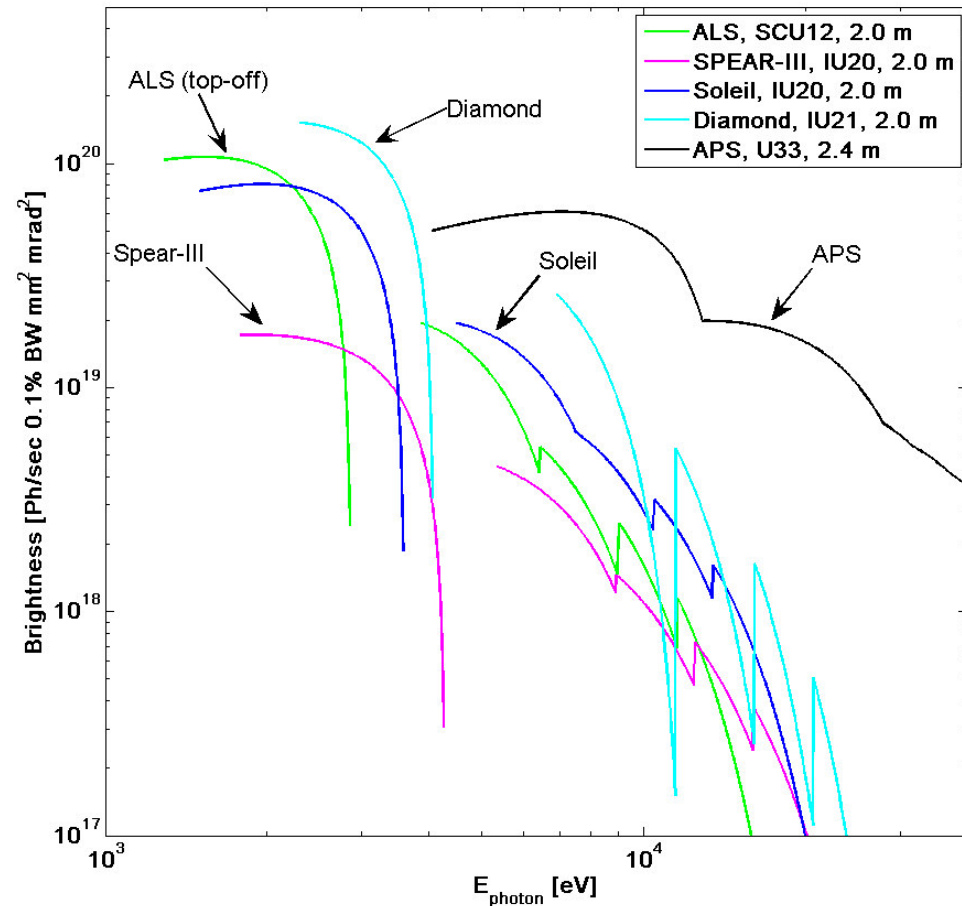



# Availability, Reliability, MTBF

FY-2005: Lost Beam Time from "Beam Dump" Events  
 During User Operations Periods  
 Mean Time Between Failures (MTBF)  
 Mean Time To Recover (MTTR)  
 Scheduled = 5546 hours

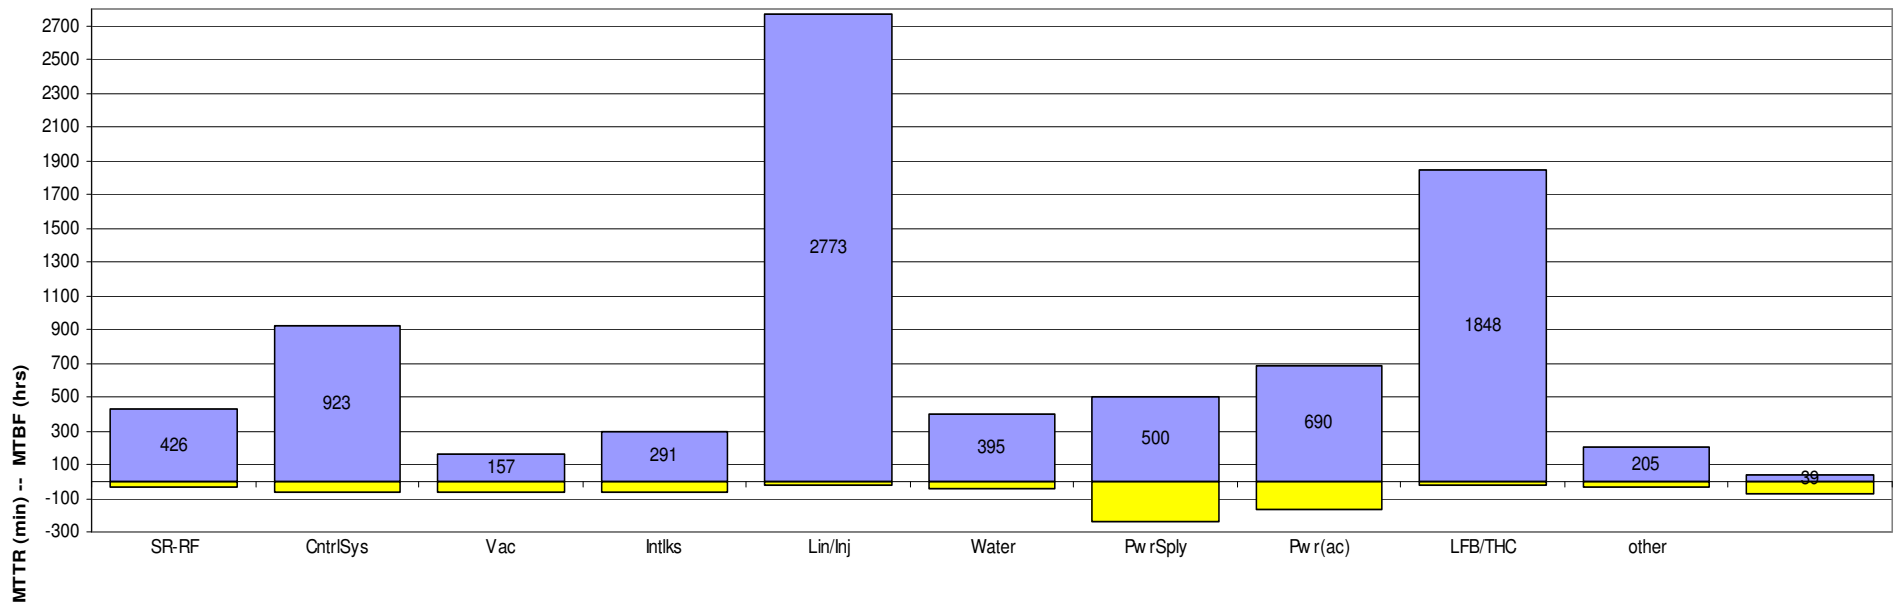

- Last year has been a good year in terms of reliability!
  - About 96.4% availability = beam time delivered/scheduled
  - Mean time between failure during user operation periods about 39 hours